

The background of the advertisement is a photograph of two soldiers in a field. One soldier in the foreground is wearing a red shirt and a tan helmet, looking down at a rifle. Another soldier in the background is wearing a camouflage shirt and a tan helmet, also looking down. The rifles are mounted on bipods. Overlaid on the image is a large, semi-transparent circular graphic with concentric circles and a red arrow pointing upwards, resembling a target or a compass rose. The title 'REVOLUTION BIPOD' is written in large, white, sans-serif capital letters across the center of the image. The word 'REVOLUTION' is split by the red arrow graphic.

# REVOLUTION BIPOD

With the REVOLUTION™ BIPOD, a rifle can revolve 360° using the inner race inside the mount, so a stable shot can be taken at any degree of rotation while maintaining the two axis of motion control, side-to-side and up-and-down. That position can then be held by simply locking it in place by tightening with the Tri nut on the bottom of the mount.

INFO@ELITEIRON.COM | WWW.ELITEIRON.COM | 406-244-0234



# INSTALLATION

The REVOLUTION™ BIPOD is to be mounted on the rifle with leg latches facing the shooter. This allows for easy adjustment of leg length. Different mounts are available to integrate the REVOLUTION™ BIPOD with multiple weapon systems. To install a REVOLUTION™ BIPOD on a different mount remove the serrated lock ring (see image below) by turning counter clockwise and slide the ring off. Install bipod and thread serrated lock ring onto the new mount.

# ADJUSTMENT


The Tri nut located at the base of the ring is for locking or tensioning the cant of rifle in the REVOLUTION™ BIPOD.

For the Panning model of the REVOLUTION™ BIPOD the tension adjusting bolt on the top of the saddle can be adjusted for each shooters preference in tension using a T27 Torx wrench. REVOLUTION™ BIPOD's are shipped with this bolt fully tightened.

# CLEANING

To clean the BIPOD race remove the serrated lock ring by turning counter clockwise and slide the ring off. Clean both race surfaces with a clean rag and apply any type of waterproof grease. Reassemble.

A drop of oil can be applied to the leg extensions or leg attachment if the user desires.

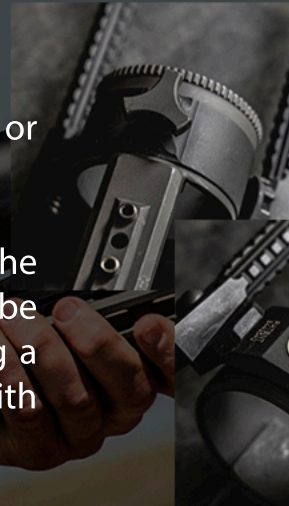



# FOOT REPLACEMENT

The REVOLUTION™ BIPOD feet can be swapped out with other available styles. The retaining bolts do not require Locktite.

Extend the leg extension all the way and place extension in a padded vise.

Unscrew foot bolt, remove foot. Installation is the reverse of removal.

**Failure to secure leg extension before foot removal will cause damage to the extension and cause malfunctioning of part. Improper foot replacement is not covered under our warranty.**



ADDITIONAL FEET



SKI



MOUNTAIN



RUBBER



STANDARD

# WARRANTY

The REVOLUTION™ BIPOD comes with a 2 year limited warranty. Elite Iron has in place a very rigid manufacturing and assembly process in building the highest quality products. Our bipods are warranted to be free from defects both in materials and workmanship for two years during normal use. If the need to have the bipod inspected or serviced at any time, when determined that the product is at fault, we will repair the product free of charge.

This warranty does not cover damage to either the REVOLUTION™ BIPOD or host weapon resulting in whole or in part from: use in a criminal act, negligence or abuse, any type of modifications, or careless handling. Elite Iron assumes no liability for damages or bodily injury caused by the above mentioned conditions. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

All parts for the REVOLUTION™ BIPOD are replaceable and available from Elite Iron.

Call us at (406)244-0234 with any questions you may have.

Manufactured under following U.S Patents: 8904693 B&T Inc  
9435601, 8863430, 8443540, and 9803947

“ELITE IRON” and “REVOLUTION™ BIPOD” are registered trademarks of  
ELITE IRON LLC